


30RKD/1100

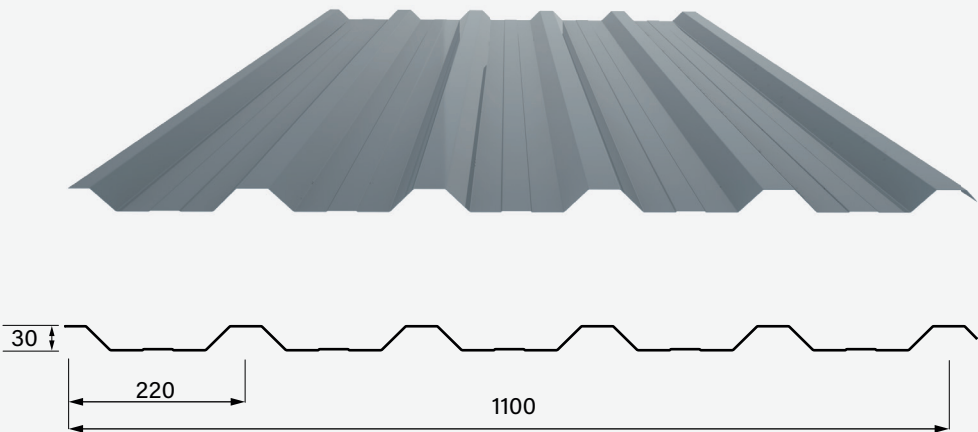

Technische Eigenschaften

Profilplattentyp	Dicke des Stahls [mm]	Gewicht [kg/m²]	I _{eff} [cm⁴/m]
30RKD/1100	0,50	4,5	3,65
	0,63	5,6	5,20
	0,70	6,2	6,00
	0,75	6,7	6,60

Stahlsorte	S280GD, S320GD		
Beschichtungen	Colorcoat HPS200 Ultra®, Prisma® 65, Prisma® 40, Granite® HDX, Granite® HDS, Polyester, Holzmaserung Plastisol, Delft Unique Colour, Magnelis® ZM100, Magnelis® ZM120, Galvanisiert Z275, Innenbeschichtung, Alu Zink 185		
Optional	Kondensationshemmender Filz		
Abmessungen	Standard	600 - 11.500	
Länge [mm]	Minimum	500	
	Maximum	13.000	
Verpackung	Max. Anzahl pro Paket	75 Stück	
	Max. Gewicht pro Paket	2.000 kg	
Zertifikate	   		
Maßnorm	NEN-EN 14782		