


30RKD/1100

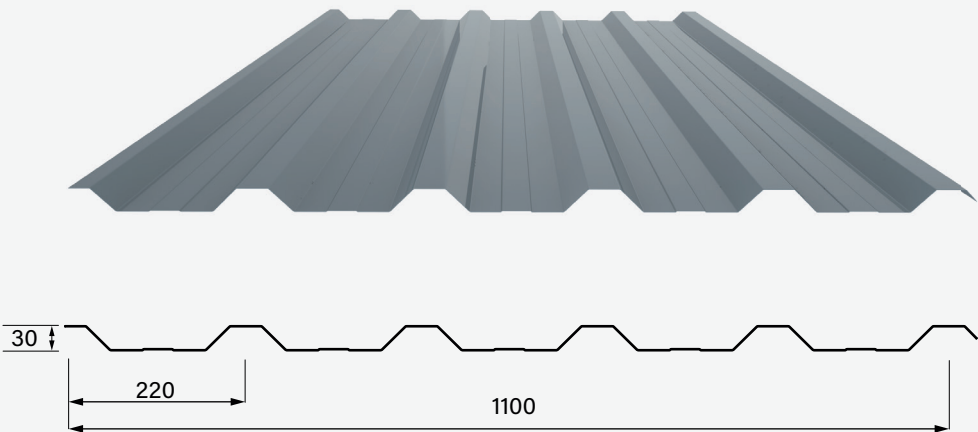

Technical properties

Profile plate type	Steel thickness [mm]	Weight [kg/m ²]	I _{eff} [cm ⁴ /m]
30RKD/1100	0.50	4.5	3.65
	0.63	5.6	5.20
	0.70	6.2	6.00
	0.75	6.7	6.60

Steel grade	S280GD, S320GD		
Coatings	Colorcoat HPS200 Ultra®, Prisma® 65, Prisma® 40, Granite® HDX, Granite® HDS, Polyester, Wood grain plastisol, Delft Unique Colour, Magnelis® ZM100, Magnelis® ZM120, Galvanised Z275, Interior coating, Aluzinc 185		
Optional	Anti-condensation felt		
Dimensions	Standard	600 - 11,500	
Length [mm]	Minimum	500	
	Maximum	13,000	
Packaging	Max. number per package	75 off	
	Max. weight per package	2,000kg	

Certificates

CE

ISO 9001

QUALITY ASSURANCE MANAGEMENT

ISO 14001

ENVIRONMENTAL MANAGEMENT

BES 6001

Responsible Sourcing

Standard dimensioning NEN-EN 14782