


30KD/1100

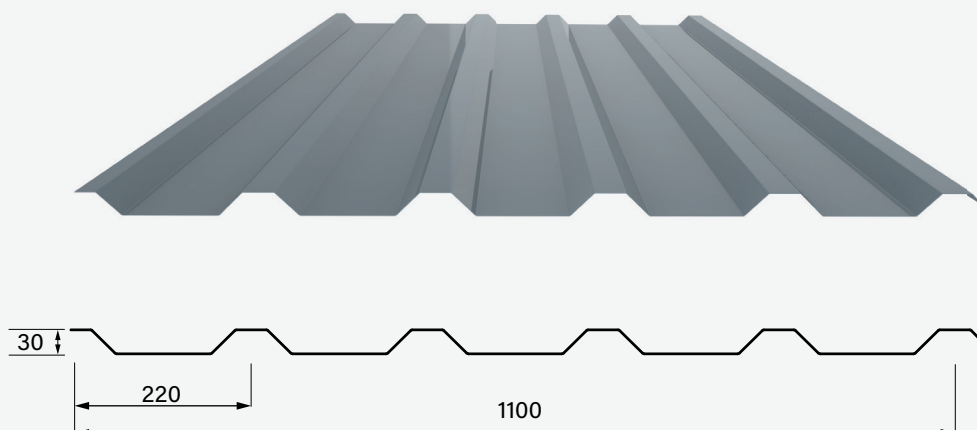

Technische eigenschappen

Profielplaatype	Staaldikte [mm]	Gewicht [kg/m ²]	I _{eff} [cm ⁴ /m]
30KD/1100	0,50	4,5	3,65
	0,63	5,6	5,20
	0,70	6,2	6,00
	0,75	6,7	6,60

Staalkwaliteit

S280GD, S320GD

Coatings

Colorcoat HPS200 Ultra®, Prisma® 65, Prisma® 40, Granite® HDX, Granite® HDS, Polyester, Houtnerf plastisol, Delft Unique Color, Magnelis® ZM100, Magnelis® ZM120, Verzinkt Z275, Interieur coating, Alu zink 185

Optioneel

Anti-condensvilt

Afmetingen

Standaard 600 - 11.500

Lengte [mm]

Minimaal 500

Maximaal 13.000

Verpakking

Max. aantal per pakket 75 stuks

Max. gewicht per pakket 2.000 kg

Certificaten



Norm maatvoering

NEN-EN 14782