


35RKD/1035

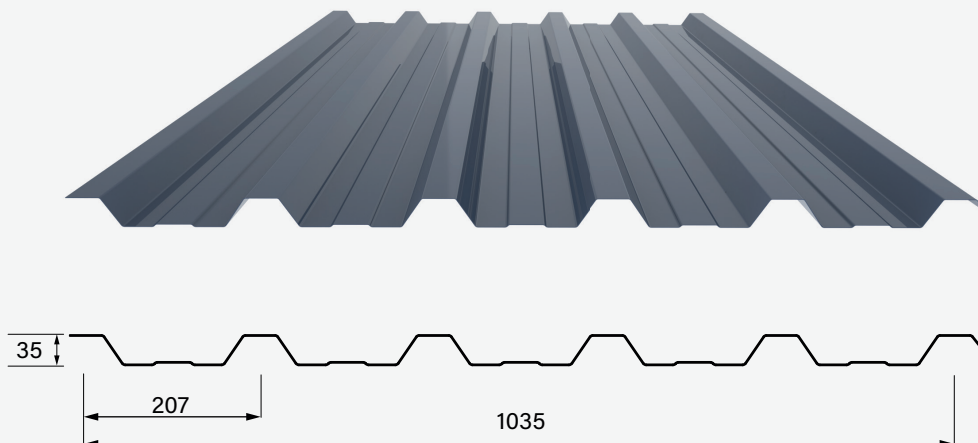

Technische eigenschappen

Profielplaattype	Staaldikte [mm]	Gewicht [kg/m²]	I _{eff} [cm⁴/m]
35RKD/1035	0,63	6,0	9,40
	0,70	6,6	10,90
	0,75	7,1	12,00
	0,88	8,3	14,90

Staalkwaliteit

S280GD, S320GD

Coatings

Colorcoat HPS200 Ultra®, Prisma® 65, Prisma® 40, Granite® HDX, Granite® HDS, Polyester, Houtnerf plastisol, Delft Unique Color, Magnelis® ZM100, Magnelis® ZM120, Verzinkt Z275, Interieur coating, Alu zink 185

Optioneel

Anti-condensvilt

Afmetingen

Standaard 600 - 11.500

Lengte [mm]

Minimaal 500

Maximaal 13.000

Verpakking

Max. aantal per pakket 75 stuks

Max. gewicht per pakket 2.000 kg

Certificaten



Norm maatvoering

NEN-EN 14782