
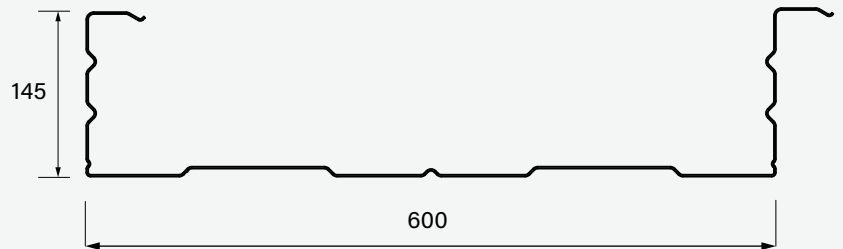


145/600

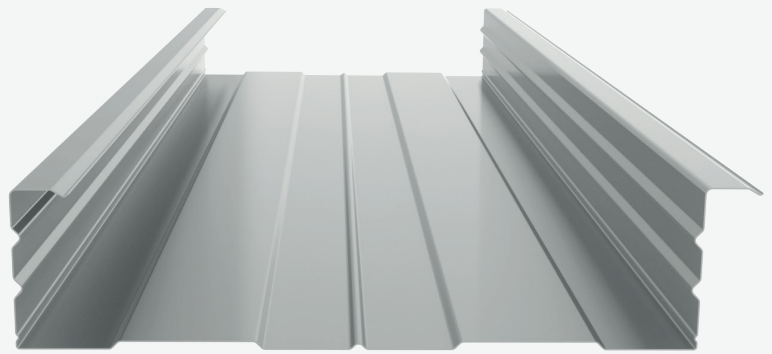

Technische eigenschappen

| Profielplaatype | Staaldikte [mm] | Gewicht [kg/m ²] | I _{eff} [cm ⁴ /m] | Gewicht Perfo[kg/m ²] | I _{eff} [cm ⁴ /m] |
|-----------------|-----------------|------------------------------|---------------------------------------|-----------------------------------|---------------------------------------|
| 145/600 | 0,75 | 10 | 246,00 | 8,5 | 162 |
| | 0,88 | 11,7 | 314,00 | 9,9 | 190 |
| | 1,00 | 13,2 | 376,00 | 11,2 | 216 |
| | 1,25 | 16,5 | 473,00 | 13,9 | 272 |
| | 1,50 | 19,8 | 571,00 | 16,7 | 328 |

| | |
|----------------|---------------|
| Staalkwaliteit | S320GD |
| Coatings | Verzinkt Z275 |
| Optioneel | Geperforeerd |

| | | |
|-------------|-----------|----------------|
| Afmetingen | Standaard | 1.800 - 15.000 |
| Lengte [mm] | Minimaal | 1.800 |
| | Maximaal | 22.000 |

| | | |
|------------|------------------------|----------|
| Verpakking | Max. aantal per pakket | 16 stuks |
|------------|------------------------|----------|

Certificaten

